



TGM102

FEATURES / 产品特性

- ◆ 10路输入：6路单声输入+2路双声输入
- ◆ 多组辅助输出（主输出/监听/AUX/编组/莲花输出等）
- ◆ Low Cut低切、高中低3段均衡器，中段可选频
- ◆ 内置24 Bit 双效果（EFF1/2），参数可调
- ◆ 2辅助(AUX)，2编组，AFS自动反馈抑制
- ◆ 主声道L/R，编组GROUP，PFL监听等母线信号分配按钮
- ◆ 60mm高精度电平衰减推子，静音MUTE
- ◆ LCD彩屏显示、蓝牙、MP3播放、USB OTG
- ◆ 48V幻象供电
- ◆ 10 inputs: 6 mono inputs + 2 dual inputs
- ◆ Multiple groups of auxiliary outputs (main output/monitor/AUX/group/lotus output, etc.)
- ◆ Low Cut, 3-band equalizer for high, middle and low, with selectable frequency in the middle
- ◆ Built-in 24 Bit dual effects (EFF1/2), parameters are adjustable
- ◆ 2 auxiliary (AUX), 2 groups, AFS automatic feedback suppression
- ◆ Main channel L/R, grouping GROUP, PFL monitoring and other bus signal distribution with buttons
- ◆ 60mm high-precision level attenuation fader, silent MUTE
- ◆ LCD color screen display, Bluetooth, MP3 playback, USB OTG
- ◆ 48V phantom power supply

采用数字技术融入紧凑的模拟调音台格局内部，延续传统模拟调音台直观响亮的操控和坚固耐用的结构，同时进一步结合了数字调音台上的专门技术，如录音棚级、强大的数字处理器，让兼容和扩展能力再一次被加强。道就在不同的应用场景，应用各种配置，都能以高性能、佳音质和稳定性塑造声音。

Inside the analog mixer architecture encapsulated with digital technology, traditional analog mixers are used to analyze the smooth control and reinforced structure of the structure, and at the same time, it is further combined with specialized technologies on digital mixers, such as recording studio microphone preamplifiers and built-in The digital processor further enhances compatibility and expansion capabilities. For different application scenarios, apply multiple configurations to improve performance, sound quality and stability.

MICKLE®

PROFESSIONAL POWER MIXER 专业带功放调音台系列

基于MICKLE出色的调音台基础上研发出便携性、高质量的功放调音台。




4x800W 8Ω
桥接可达: 3200W

4x350W 8Ω
桥接可达: 880W



PMR-XP SERIES

[PMR1280 XP4 / PMR1280 XP8]
[PMR1680 XP4 / PMR1680 XP8]

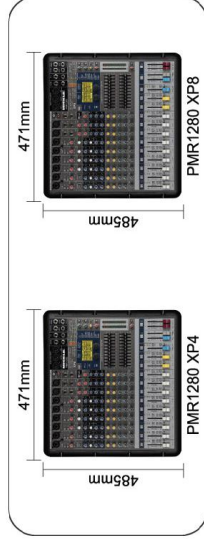

多功能PMR新款带功放调音台拥有充足强劲的数字功放(4x800/8Ω五立体声或3200瓦桥接模式, 4x350/8Ω五立体声或880瓦桥接模式), 同时保持令人难以置信的功率重量比。

采用高效的数字技术和最先进的开关模式电源, 这大大降低了重量和热量。配有12声道, 内置8个工作室级麦克风前置放大器, 3个立体声声道, 24Bit 24DSP专业级的预设效果种类, 包括工作室级延迟, 合唱, 移相等多种效果; 再加上双个11波段立体声图形EQ与我们专有带Q值和灵敏度调节的AFS反馈抑制/防啸叫、SUBWOOFER (低音炮) 单声道M/C带扫描调节输出, 易于使用。

优秀的功放确保了最大的能效和最少的热量。适用中小型演出、会议、卡拉OK包间等。

The Multi-function PMR new power mixer has powerful digital amplifiers (4x800W/8Ω stereo or 3200W in bridge mode, 4x350W/8Ω stereo or 880W in bridge mode) while maintaining an incredible power-to-weight ratio. Using efficient digital technology and the most advanced switching mode power supply that reduces their weight and heat.

Equipped with 12 channels, built-in 8 studio-level microphone pre-amplifiers, 3-stereo, 24Bit, 24DSP professional-level preset effect types, including studio-level delay, chorus, panning and other effects; Dual 11-band stereo graphic EQ and our proprietary AFS feedback suppression with Q value and sensitivity adjustment - anti-howling, SUBWOOFER mono M/C with sweep adjustment output easy to use. Suitable for small and medium-sized performances, conferences, multi-function halls, karaoke rooms, small performances and other live sound solutions.

FEATURES / 产品特性

- ◆12路输入, 6个单声道+3个立体声道
- ◆单声道带有PAD(衰减)和HPF(高通滤波器-低切)功能
- ◆1-2配有AFS (反馈抑制/防啸叫), 带Q值和灵敏度调节
- ◆配有48V幻象供电 (1-4/5-12分投供电模式)
- ◆高中低3段均衡器, 中段可选插
- ◆PAN声像定位静音开关, 失真监控灯(OL), 通道信号电平灯显示
- ◆60mm高精度电平表衰减推子, 静音MUTE
- ◆SUBWOOFER (低音炮) 独立单声道M/C带扫描调节输出
- ◆SOLO独奏, 编组GROUP, 主声道MAIN等母线信号分配按钮
- ◆11级立体声图形均衡器, 双12电平监视
- ◆12 channels mic input; 6 mono input+ 3 stereo input.
- ◆There is AFS anti-howling with Q value and sensitivity adjustment on1-2 ch.
- ◆Aux, FX, GROUP, RETURN, Tape lotus, make it easy to connect external electric devices.
- ◆Built-in 24-bit/48kHz sampling frequency rate sound card connecting to IOS/Android/PC for recording or playing music
- ◆11 band stereo graphic equalizer. Double 12 level monitoring,

- ◆AUX辅助发送, FX效果, GROUP编组, RETURN返回, TAPES莲花接口, 方便外接其他电子设备
- ◆内置双24种24Bit DSP效果种类预设
- ◆USB播放, LCD点阵屏
- ◆支持24-bit/48kHz采样率声卡可方便连接电脑进行各种录音, 播放操作
- ◆带4路直通外置功放TRS接口, 4通道盲插接口
- ◆可选功率:4x350W/8Ω 桥接模式3200W
- ◆4x800W/8Ω 桥接模式3200W
- ◆内置新式防尘电源接口, 使用220V, 50Hz宽频电源

- ◆Single channel with PAD and HPF
- ◆48V phantom power supply
- ◆Channel four equalizer(high,mid&mid frequency,low)
- ◆Pan Localization, signal distortion monitoring.
- ◆60mm highly-precise level attenuation fader, MUTE
- ◆LCD color screen visual features
- ◆Built-in double 24 kinds of 24Bit DSP effects

Technical Parameters/技术参数

型号 Model	PMR1280 XP4	PMR1280 XP8	PMR1680 XP4	PMR1680 XP8
通道 Channels	6 Mono +3 Stereo	6 Mono +3 Stereo	10 Mono+3 Stereo	10 Mono+3 Stereo
通道均衡 Channel EQ	3 Band	3 Band	3 Band	3 Band
辅助输出 AUX	2	2	2	2
返回 Return	1 Stereo	1 Stereo	1 Stereo	1 Stereo
效果器 Effector	Double 24 DSP	Double 24 DSP	Double 24 DSP	Double 24 DSP
主控均衡 Main EQ	2 x 12 Band	2 x 12 Band	2 x 12 Band	2 x 12 Band
主输出 Main Out	1	1	1	1
编组输出 Groups	1 Stereo	1 Stereo	1 Stereo	1 Stereo
幻象电源 Phantom Power	48V DC	48V DC	48V DC	48V DC
功放输出 Power Output	4 x 350W (8Ω)	4 x 800W (8Ω)	4 x 350W (8Ω)	4 x 800W (8Ω)
USB/REC Player	√	√	√	√
重量 Weight	13.2kg<12CH>	14.45kg<12CH>	15.15 kg<16CH>	16.4 kg<16CH>
规格尺寸 Dimensions mm(H*W*L)	471x485x190mm	471x485x190mm	587x485x190mm	587x485x190mm



PM10FX

FEATURES / 产品特性

- ◆ 10路输入，6个单声道话筒+2个立体声道话筒
- ◆ 单声道配有Low Cut (低切)功能
- ◆ 1路AUX辅助发送/效果FX发送控制
- ◆ PAN声像定位静音开关，信号失真指示灯
- ◆ 60mm高精度电平衰减推子
- ◆ AUX, TAPE和FX接口，方便外接其他电子设备
- ◆ LCD数码屏可视多种功能内容
- ◆ 内置专业24BIT 48K采样率声卡USB接口可方便连接IOS/Android/PC, 进行各种录音、播放或直播操作
- ◆ 内置256种24BIT DSP效果器
- ◆ 双12路电平监视，48V幻像供电
- ◆ 环牛变压器 (380W×2/40)
- ◆ U段无线麦克风 (选配)
- ◆ 选配19寸机柜侧板
- ◆ 重量: 6.95KG
- ◆ 尺寸: 440x410x155MM

- ◆ 10 channels mic input: 6 mono input+2 stereo input.
- ◆ Single channel with Low Cut
- ◆ 1 AUX send+1 FX send
- ◆ Pan Localization, mute, signal distortion monitoring.
- ◆ 60mm highly-precise level attenuation fader.
- ◆ AUX, Tape lotus, FX, make it easy to connect external electric devices.
- ◆ Built-in 24-bit/48kHz sampling frequency rate sound card connecting to IOS/Android/PC for recording or playing music

PM非常适合对高端音质和便捷操作有所追求的音乐人、表演者、DJ和演讲等，并能将他们的扩声水平提升到一个全新境界。配备A类离散式话筒+48V幻像电源，使其音色丰富而平滑，音质优于业内同类产品。加上普通TRS线输入、立体声线输入、RCA输入、LOW CUT、3波段均衡器、AUX发送、内置256效果器，U段无线麦克风 (可选配) 使您只需准备扬声器和一个话筒，即可配置出一套功能全面、便携、使用可靠的音响系统，您可以在各个场合以任何方式进行混音、处理并传递您的声音。

PM is ideal for musicians, performers, DJs and speakers who are looking for high-end sound quality and portability, and can take their sound amplification to a whole new level. Equipped with Class A discrete speaker and +48V phantom power supply, the sound color is rich and smooth, and the sound quality is superior to similar products in the industry. Plus channel TRS wire input, stereo wire input, RCA input, LOW CUT, 3-band equalizer, AUX transmission, LCD color display, PFL mute, built-in 256 effects, U segment wireless microphone (optional) so that you only need to prepare a speaker and a microphone. You can configure a full-featured, portable, reliable sound system that allows you to mix, process and deliver your voice in any way, anywhere.

PMX1000

2x800W 8Ω

PMX1400

2x800W 8Ω

PMX1000S

2x350W 8Ω

PMX1400S

2x350W 8Ω

FEATURES / 产品特性

- ◆ 10路输入，6个单声道+4个立体声道
- ◆ 每路拥有Low Cut (低切)功能，
- ◆ 1-2配有FBX防啸叫，带Q值和灵敏度调节
- ◆ 3-4配有内置高阻抗Hi-Z连接器
- ◆ 每个通道配有48V幻像供电
- ◆ 通道: 高、中、低、低4段EQ
- ◆ PAN声像定位静音开关，失真监控(PK)，峰值灯(SIG)
- ◆ 70mm高精度电平衰减推子，监听PFL
- ◆ AUX辅助发送(XLR接口), FX, SUB, TAPE莲花接口，方便外接其他电子设备
- ◆ 11段立体声图形均衡器，双12电平监视
- ◆ 两个预设可编辑的24种高质量效果种类
- ◆ USB播放，LCD点阵屏可视多种功能内容
- ◆ 内置24-bit/48kHz采样率声卡可方便连接电脑进行各种录音、播放操作
- ◆ 两种功率可选: 2x350W 8Ω/2x800W 8Ω
- ◆ 内置220V, 50Hz宽频电源
- ◆ 尺寸: 500x515x150mm(PMX1000)
- ◆ 重量: 11.3kg(PMX1000)



PMX1000/PMX1400

- ◆ 10 channels mic input: 6 mono input+4 stereo input.
- ◆ Low Cut each channels.
- ◆ There is FBX anti-howling with Q value and sensitivity adjustment on 1,2 ch. Built-in high impedance Hi-Z connector on 34ch, 48V phantom power supply on 5-6ch.
- ◆ Channel four-band parameters equalizer(high,mid&mid frequency,low)
- ◆ AUX send, FX, SUB, Tape lotus, make it easy to connect external electric devices.
- ◆ Built-in 24-bit/48kHz sampling frequency rate sound card connecting to computer or phone for recording or playing music

- ◆ 11 band stereo graphic equalizer. Double 12 level monitoring.
- ◆ USB play, LCD lattices screen viewing multiple functions.
- ◆ Pan Localization, mute, PK, SIG.
- ◆ Double high quality editable FX with 94 built-in effect types preset
- ◆ 70mm highly precise level attenuation fader, PFL.
- ◆ Built-in 220V, 50Hz broadband power supply.
- ◆ Weight: 11.3KG(PMX1000)
- ◆ Dimensions: 500x515x150mm(PMX1000)

专业级A类话放，复合晶体管相位设计，定义了话放厚重、丰富而平滑音色，使音质优于业内同类产品，并配置专属的EQ模块塑造，捕捉真实的模拟声音特性，结合Hi-Z, LOW CUT, FBX防啸叫反馈抑制器、LCD显示屏，等多种功能。


PMX1000属于完全自足式的调音台，可靠的技术带来成功混音所需的所有功能。D类功放确保了最大的能效和最少的热量。适用中小型演出、会议、卡拉OK包间。

The compact PMX series is a fully self-contained mixer with reliable technology that brings all the features needed for successful mixing. Class A amplifiers ensure maximum energy efficiency and minimum heat. Suitable for small and medium performance, conference, karaoke room.



PMR SERIES

【PMR630 / PMR860 / PMR1260 / PMR1660】

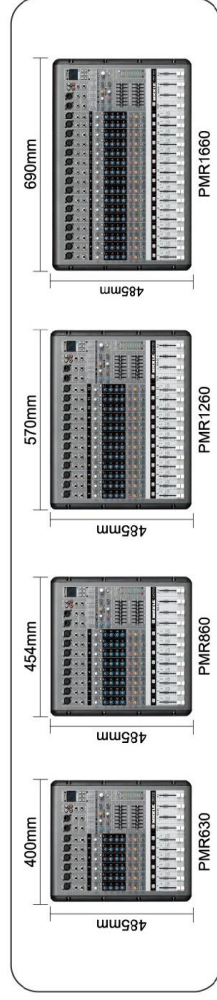

紧凑方便的PMR系列是完全自足式的调音台，可靠的MICKLE调音台技术带来成功的混音所需的所有工具。优秀的功放确保了最大的能效和最少的散热。适用中小型演出、会议、卡拉OK包间。

Amplifier multifunctional mixer, reliable xtimizel and debug. all the tools you need to successfully mix, fully optimized and debug, prices are extremely high. For small and medium performance, liquidity events performances, conferences, Kara OK rooms.

FEATURES / 产品特性

- ◆ 带功放多功能调音台
- ◆ 6/8/12/16路单声输入
- ◆ 通道4段均衡
- ◆ 一组辅助发送，一组返回
- ◆ 60mm高精度对数式衰减推子
- ◆ 24BitDSP效果器
- ◆ 双七段图示均衡
- ◆ 蓝牙、USB播放
- ◆ +48V幻象电源
- ◆ 2 X 650W/4Ω
- ◆ 8路可安装机柜侧板
- ◆ 通道哑音功能
- ◆ 6/8/12/16 Mic Input
- ◆ 4 band EQ
- ◆ 1 Stereo Output
- ◆ 1 Aux sends+1 Stereo return
- ◆ 60mm logarithmic fader
- ◆ 24 Bit DSP
- ◆ 2*7 band EQ On Main Output
- ◆ 48V phantom power supply
- ◆ 2 X 650W/4Ω
- ◆ XLR Balance Output
- ◆ USB/REC Player


Technical Parameters/技术参数

型号 Model	PMR630	PMR860	PMR1260	PMR1660
通道 Channels	6 Mono	8 Mono	12 Mono	16 Mono
通道均衡 Channel EQ	4 Band	4 Band	4 Band	4 Band
辅助输出 AUX	1	1	1	1
返回 Return	1	1	1	1
效果器 Effector	24 Bit DSP	24 Bit DSP	24 Bit DSP	24 Bit DSP
主控均衡 Main EQ	7 Band	7 Band	7 Band	7 Band
主输出 Main Out	1 Stereo	1 Stereo	1 Stereo	1 Stereo
幻象电源 Phantom Power	48V DC	48V DC	48V DC	48V DC
功放输出 Power Output	350W x 2 (4Ω)	650W x 2 (4Ω)	650W x 2 (4Ω)	650W x 2 (4Ω)
USB/REC Player	√	√	√	√
重量 Weight	12.7kg-6CH->	14.7kg-8CH->	16.65kg-12CH->	18.6kg-16CH->
规格尺寸 Dimensions mm(H*W*L)	190x400x485mm	190x454x485mm	190x570x485mm	190x690x485mm



P SERIES

【P6-USB / P8-USB / P12-USB / P16-USB】

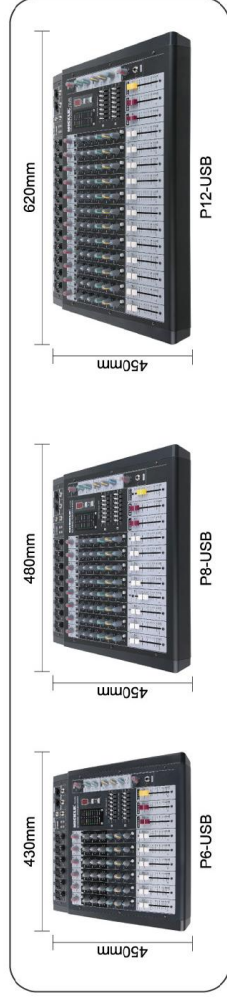

在MICKLE调音台完美音质基础上，研发出带功放调音台，出色的混音效果。适用于中小型演出、流动性活动表演、会议、卡拉OK包间。

P-series with high cost performance is known, excellent variety of channel selection is used for performance, rental companies and wedding events.

FEATURES / 产品特性

- ◆ 带功放多功能调音台
- ◆ 6/8/12/16路单声输入
- ◆ 通道3段均衡
- ◆ 一组辅助发送，一组返回
- ◆ 6/8/12/16 Mic Input
- ◆ 3 band EQ
- ◆ 1 Aux sends+1 Aux return
- ◆ 60mm高精度对数式衰减推子
- ◆ DSP效应器
- ◆ 双七段主控均衡
- ◆ 27 band EQ On Main Output
- ◆ 60mm logarithmic fade
- ◆ 16 DSP
- ◆ 蓝牙、USB播放
- ◆ +48V幻像电源
- ◆ 可选功率：2×250W/4Q
2×380W/4Q
- ◆ Bluetooth/USB player
- ◆ 48V phantom power supply
- ◆ 2×250W~380W 4Q(Optional)


Technical Parameters/技术参数

型号 Model	P6-USB	P8-USB	P12-USB	P16-USB
通道 Channels	6 Mono	8 Mono	12 Mono	16 Mono
通道均衡 Channel EQ	3 Band	3 Band	3 Band	3 Band
辅助输出 AUX	1	1	1	1
返回 Return	1	1	1	1
效果器 Effector	16 Bit DSP	16 Bit DSP	16 Bit DSP	16 Bit DSP
主控均衡 Main EQ	2x7 Band	2x7 Band	2x7 Band	2x7 Band
主输出 Main Out	1 Stereo	1 Stereo	1 Stereo	1 Stereo
幻象电源 Phantom Power	48V DC	48V DC	48V DC	48V DC
功放输出 Power Output	250W~380W(4Q)	250W~380W(4Q)	250W~380W(4Q)	250W~380W(4Q)
USB/REC Player	√	√	√	√
重量 Weight	10.10kg<6CH>	11.95kg<8CH>	14.55kg<12CH>	17.15kg<16CH>
规格尺寸 Dimensions mm(H*W*L)	170x430x450mm	170x480x450mm	170x620x450mm	170x740x450mm



PFC SERIES

【PFC802 / PFC806】

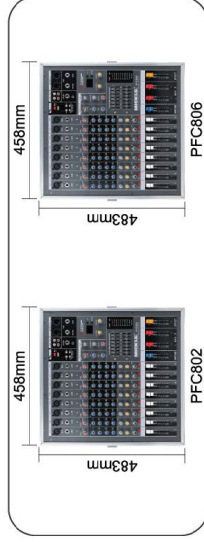

PFC系列使用机架式机箱，便于携带，外观坚固，适用于小型活动演出、路演、租赁公司以及婚庆活动。

PFC Cabinet chassis series, portable, rugged appearance, ease of mobility performance, performance that for small events, roadshows, and leasing companies, as well as wedding events.

FEATURES / 产品特性

- ◆ 便携式带功放多功能调音台
- ◆ 8路串声输入
- ◆ 通道4段均衡
- ◆ 一组辅助发送，一组返回
- ◆ 8 MIC Input
- ◆ 4 band EQ
- ◆ 1 Aux send+1 Aux return
- ◆ 60mm高精度对数式衰减推子
- ◆ 16DSP效果器
- ◆ 双七段主控均衡
- ◆ 一组立体声输出
- ◆ 2*7 band EQ On Main Output
- ◆ 60mm logarithmic fader
- ◆ 16 DSP
- ◆ +48V幻象电源
- ◆ 可选功率：2X380W/4Ω
- ◆ 2X550W/4Ω
- ◆ 通通哑音功能
- ◆ 1 Stereo Output
- ◆ 48V phantom power supply
- ◆ 2 X 380W/4Ω 2 X 550W/4Ω (Optional)



Technical Parameters/技术参数

型号 Model	PFC802	PFC806
通道 Channels	8 Mono	8 Mono
通道均衡 Channel EQ	4 Band	4 Band
辅助输出 AUX	1	1
返回 Return	1	1
效果器 Effector	16 Bit DSP	16 Bit DSP
主控均衡 Main EQ	2X7 Band	2X7 Band
主输出 Main Out	1 Stereo	1 Stereo
幻象电源 Phantom Power	48V DC	48V DC
功放输出 Power Output	2X380W(4Ω)	2X550W(4Ω)
USB/REC Player	√	√
重量 Weight	15.9kg<-8CH>	15.9kg<-8CH>
规格尺寸 Dimensions mm(H*W*L)	240x458x483mm	240x458x483mm



MIC-TP SERIES

【MIC-TP8 / MIC-TP12】




专业调音台带功放无线话筒一体机，提供稳定可靠的表现，卓越的音质和应用灵活性，出色的混音效果，优秀的功放，确保了最大的能效和最少的散热。适用于中小型演出，流动性活动表演，会议，卡拉OK包间，多场合应用。

Professional mixer with power amplifier + wireless microphone, provide stable and reliable performance, excellent sound quality and application recording activity. Excellent mixing effect, excellent power amplifier, to ensure the maximum energy efficiency and the least heat dissipation. Suitable for small and medium sized performances, Mobile performance, conference, karaoke room, multi-occasion application.

FEATURES / 产品特性

- ◆ 8/12路箱式带功放调音台
- ◆ 通道3段均衡
- ◆ AUX辅助发送、SUB编组、COMP压缩
- ◆ 45mm高精度对数式衰减推子
- ◆ 特大彩屏显示，99DSP效果器
- ◆ USB、SD卡，播放、蓝牙播放功能
- ◆ MIC-TP8：5段图示均衡
- ◆ MIC-TP12：7段图示均衡
- ◆ MIC-TP12：监听输出
- ◆ +48V幻象电源
- ◆ U段1地2无线话筒+D类功放
- ◆ 通道配音功能，监听室监听
- ◆ MIC-TP8：350W/80HM
- ◆ MIC-TP12：800W/80HM
- ◆ 19" 机架式安装设计，卸下手提航空箱，可直接上机柜进行操作

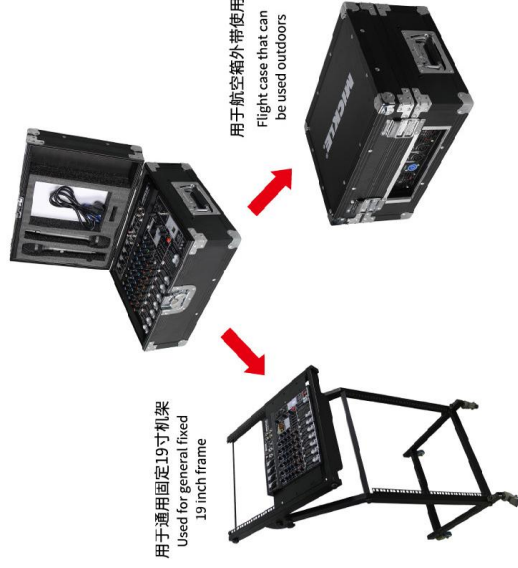

- ◆ 3 channels input,
- ◆ 6 mono channels +1 stereo channels
- ◆ 12 channels input,
- ◆ 8 mono channels +2 stereo channels
- ◆ 3 band EQ
- ◆ Aux send, SUB, COMP
- ◆ 45mm logarithmic fader
- ◆ 99 DSP + digital display
- ◆ USB/REC/Bluetooth
- ◆ 5 band EQ On Main Output
- ◆ UHF wireless microphone*2 + class D power amp
- ◆ 48V phantom power supply
- ◆ 350W/80HM, 800W/80HM
- ◆ Mute + monitoring function
- ◆ 19" rack-mountable mixer, it can be operated directly on the cabinet.


Technical Parameters/技术参数

型号 Model	MIC-TP8	MIC-TP12
通道 Channels	6 MONO+1 STEREO	8 MONO+2 STEREO
通道均衡 Channel EQ	3 Band EQ	4 Band EQ
USB/REC Player	√	√
蓝牙 Bluetooth	√	√
效果器 Effector	99 DSP	99 DSP
主控均衡 Main EQ	5 Band	7 Band
功放输出 Power Output	350W/80HM	800W/80HM
规格尺寸 Dimensions mm(H*W*L)	430x305x205mm	450x435x205mm



PM SERIES

【PM6FX / PM8FX / PM12FX / PM16FX】

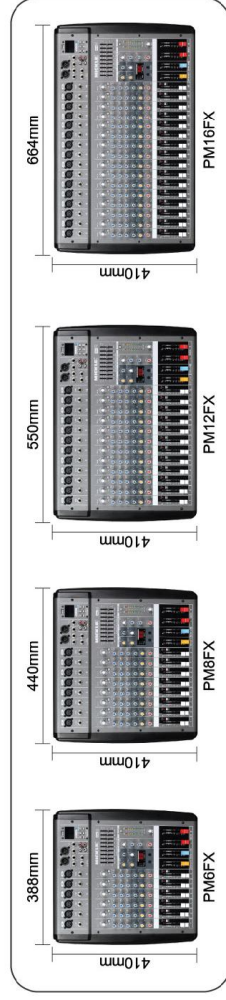

多功能带功放调音台，简单易用的质量稳定，适用于中小型演出，流动性活动表演、会议、卡拉OK包间。

Multifunction amplifier mixer, easy and stable quality. For small and medium performance, liquidity events performances, conferences, Kara OK rooms.

FEATURES / 产品特性

- ◆ 带功放多功能调音台
- ◆ 多路单声道输入
- ◆ 通道3段均衡
- ◆ 一组辅助发送，一组立体声返回
- ◆ 60MM高精度对数式衰减推子
- ◆ 16DSP处理器，可微调
- ◆ 9段图示均衡
- ◆ 蓝牙、USB播放
- ◆ 9 band EQ On Main Output
- ◆ 3 band EQ
- ◆ 1 Aux sends+1 Stereo return
- ◆ 1 Stereo Output
- ◆ 48V phantom power supply
- ◆ 2 X 380W/4Ω

Technical Parameters/技术参数

型号 Model	PM6FX	PM8FX	PM12FX	PM16FX
通道 Channels	6 Mono	8 Mono	12 Mono	16 Mono
通道均衡 Channel EQ	3 Band	3 Band	3 Band	3 Band
辅助输出 AUX	1	1	1	1
返回 Return	1 Stereo	1 Stereo	1 Stereo	1 Stereo
效果器 Effector	16 DSP	16 DSP	16 DSP	16 DSP
主控均衡 Main EQ	9 Band	9 Band	9 Band	9 Band
主输出 Main Out	1 Stereo	1 Stereo	1 Stereo	1 Stereo
编组输出 Groups	/	/	/	/
幻象电源 Phantom Power	48V DC	48V DC	48V DC	48V DC
功放输出 Power Output	2 x 380W	2 x 380W	2 x 380W	2 x 380W
USB/REC Player	√	√	√	√
重量 Weight	8.75kg<6CH>	10.3kg<8CH>	12.4kg<12CH>	13.1kg<16CH>
规格尺寸 Dimensions mm(H*W*L)	152x388x410mm	152x440x410mm	152x550x410mm	152x664x410mm



PT6

Technical Parameters/技术参数

型号 Model	PT6
通道 Channels	4 Mono+1 Stereo
通道均衡 Channel EQ	3 Band
辅助输出 AUX	1
效果器 Effector	99 DSP
主输出 Main Out	1
幻象电源 Phantom Power	48V DC
重量 Weight	3.65kg
规格尺寸 Dimensions mm(H*W*L)	250X300X115mm

FEATURES / 产品特性

- ◆ 主控5段均衡
- ◆ 99 DSP混响效果
- ◆ USB和蓝牙播放器
- ◆ 48V幻象电源供电
- ◆ 4路单声和1路立体声输入
- ◆ 一组辅助发送和效果发送
- ◆ PAN声像定位, 通道开关, 信号失真监控灯
- ◆ 48V phantom power supply
- ◆ PAN, mute, signal distortion monitoring.
- ◆ Independent monitor function
- ◆ The Built-in 2x200W power amplifier.
- ◆ Support wireless microphone (optional)

最新的PT系列调音台让你操作起来更容易, 创造出更多的传奇音乐, 播客, 视频。

PT调音台结合专业级模拟组件和内置USB/蓝牙音频连接, 亦可连接笔记本和电脑使用您喜欢的编辑软件。无论你是一个创作歌手或播客, PT调音台提供一流的功能, 这样就可以让您的创意作品让人留下深刻的印象。

The latest PT series mixer makes it easier for you to create more legendary music, podcasts, and videos.

PT Mixer combines professional-grade analog components and built-in USB/Bluetooth audio connection. It can also be connected to laptops and computers using your favorite editing software. Whether you're a singer-songwriter or a podcaster, the PT Mixer offers top-notch features so that your creative work can leave a deep impression.

可蓝牙 独立伴奏

M6



Technical Parameters/技术参数

型号 Model	M6
通道 Channels	2 Mono+1 Stereo
通道均衡 Channel EQ	3 Band
辅助输出 AUX	1
效果器 Effector	20 DSP
主输出 Main Out	1
幻象电源 Phantom Power	48V DC
重量 Weight	1.4kg
规格尺寸 Dimensions mm(H*W*L)	185X245X65mm

FEATURES / 产品特性

- ◆ 2路单声和1路立体声输入通道
- ◆ 内置20种24-Bit DSP 参数可调吉音频效果器
- ◆ 通道高低3段均衡, LCD彩色显示屏
- ◆ 2 mono and 1 stereo input channels
- ◆ Built-in 20 kinds of 24-Bit DSP parameter-adjustable audio effects
- ◆ Channel high and low 3-band equalization, LCD color display
- ◆ USB OTG and Bluetooth independent accompaniment
- ◆ 48V phantom power supply, Low Cut
- ◆ USB OTG和蓝牙独立伴奏
- ◆ 48V幻象电源供电、Low Cut低切
- ◆ PAN声像定位, 信号失真监控灯
- ◆ PAN sound and image positioning, signal distortion monitoring light
- ◆ A set of XLR main output, FX output
- ◆ Headphone monitoring output, mute

M6调音台直接采用录音棚级别的麦克风前置放大, 提供完美的音质, 高动态余量, 宽动态范围, 一流解析力和纯净度, 及极佳的信噪比。结合20效果种类, LCD彩屏显示, USB音频接口, 现场级演出音频传输技术, 让其成为一款极具性价比的专业调音台。针对现场扩声和录音等各种场合, 可流动或固定安装, 从而满足了从监听制作到会议、现场演出扩声等多种应用环境的需要。

The M6 mixer uses studio-level microphone preamps to provide perfect sound quality, high dynamic headroom, wide dynamic range, first-class resolution and purity, and excellent signal-to-noise ratio. Combined with 20 effect types, LCD color screen display, USB audio interface, and live performance audio transmission technology, it becomes a very cost-effective professional mixer.

For various occasions such as live sound reinforcement and recording, it can be installed mobile or fixedly, thus meeting the needs of various application environments from monitoring and production to conferences and live performance sound reinforcement.